

10-612 493
12-11-03

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

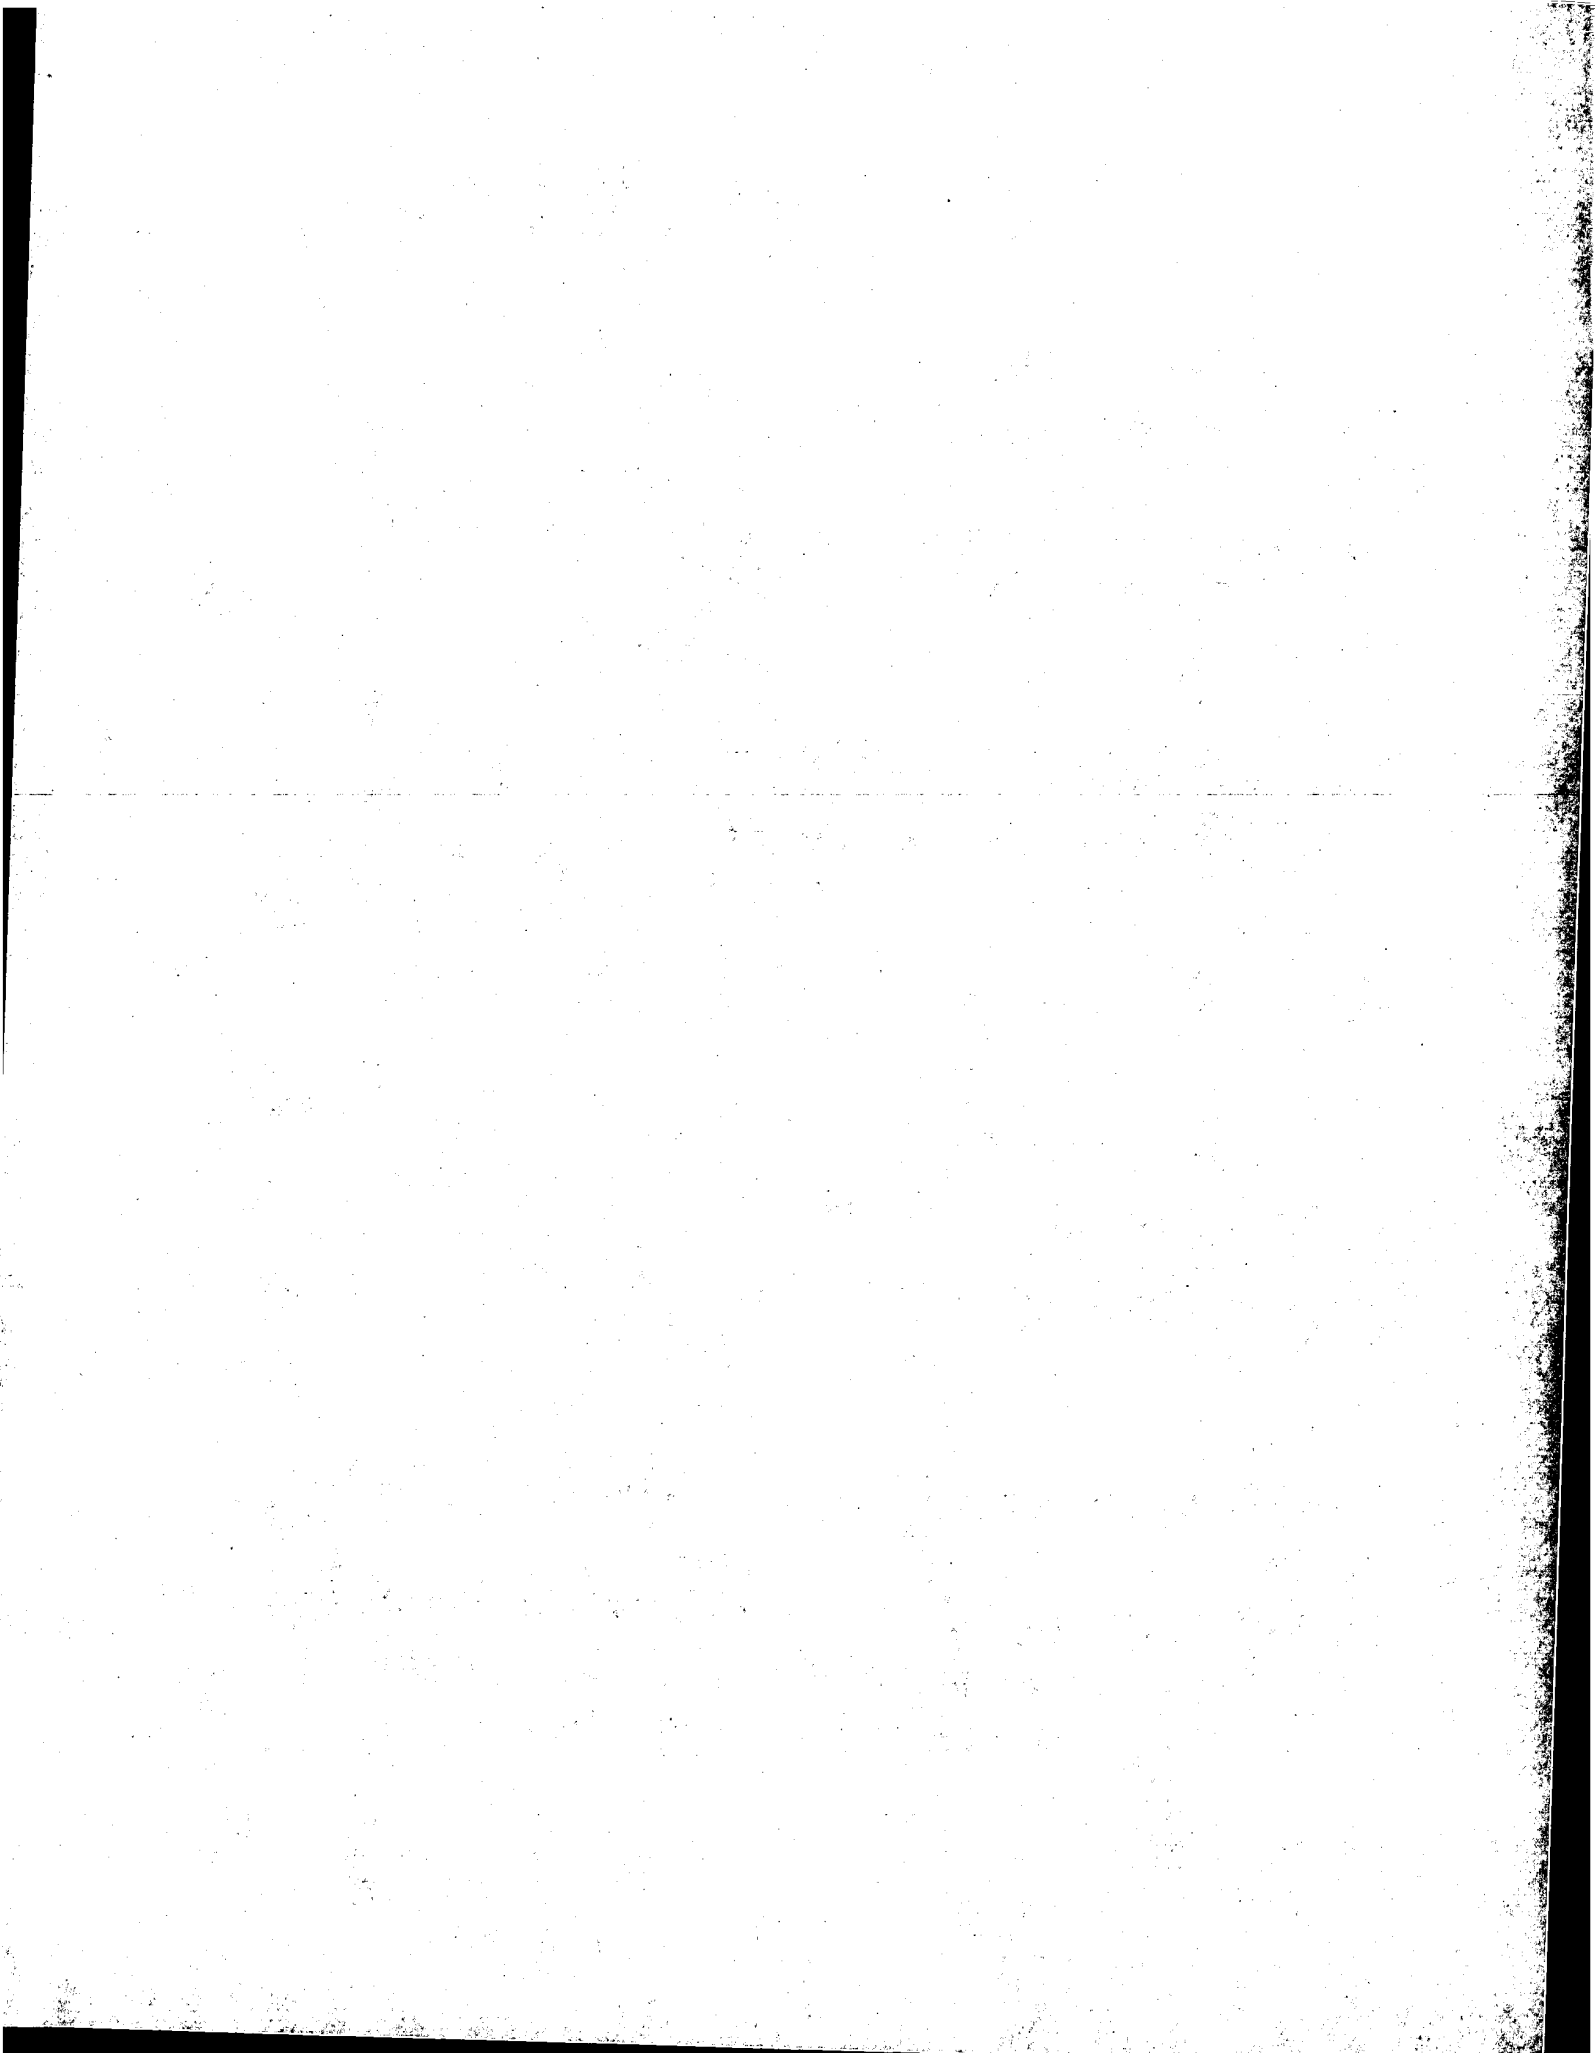

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 564 224 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 93302459.8

(51) Int. Cl.⁵: **H05B 33/14**, **H05B 33/12**

(22) Date of filing: 30.03.93

(30) Priority: 03.04.92 JP 82197/92
24.11.92 JP 313618/92

(43) Date of publication of application:
06.10.93 Bulletin 93/40

(84) Designated Contracting States:
DE FR GB NL

(71) Applicant: **PIONEER ELECTRONIC CORPORATION**
4-1, Meguro 1-chome
Meguro-ku Tokyo(JP)


(72) Inventor: **Nakada, Hitoshi**, c/o Corporate R&D Lab.
Pioneer Electronic Corp.,
6-1-1, Fujimi
Tsurugashima-shi, Saitama 350-02(JP)

(74) Representative: **Luckhurst, Anthony Henry William**
MARKS & CLERK
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(54) Organic electroluminescence device.

(57) An organic electroluminescence device comprises an electron transport layer (5), an organic emitting layer (3) and an organic hole transport layer (4) laminated in sequence and arranged between a cathode (1) and an anode (2), is characterised in that the electron transport layer is made of a 1,10- or 1,7- or 4,7-phenanthroline derivative or a 5,6-dihydro-dibenzo(bj)phenanthroline derivative. The electroluminescence device is capable of improved durability and emission of blue light at high luminance and high efficiency on application of a low voltage.

FIG. 2

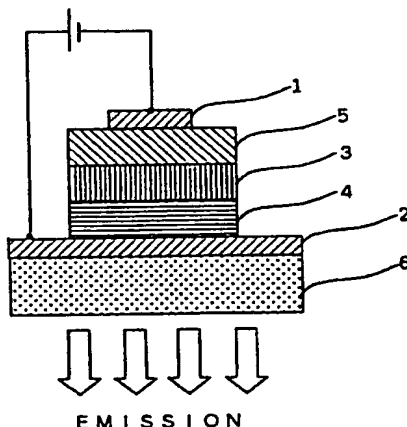

EP 0 564 224 A2

The present invention relates to an electroluminescence (EL) device having an emitting layer made of an emitting substance, which utilizes an electroluminescence phenomenon that the emitting substance emits light by applying an electric current to the emitting layer. More particularly, it is concerned with an organic EL device in which the emitting layer is made of an organic emitting substance.


As organic EL devices, there have been known a device of two-layer structure having two layers of organic compounds as shown in Fig. 1, in which an organic fluorescent thin film 3 (hereinafter referred as "emitting layer") and an organic hole transport layer 4 are laminated with each other and are arranged between a metal cathode 1 and a transparent anode 2. There have been also known a device of three-layer structure having three layers of organic compounds as shown in Fig. 2, in which an organic electron transport layer 5, an emitting layer and an organic hole transport layer 4 are laminated in sequence and are sandwiched as a whole between a metal cathode 1 and a transparent anode 2. The hole transport layer 4 facilitates the infusion of the holes from the anode and blocks electrons. The electron transport layer 5 facilitates the infusion of electrons from the cathode.

In these organic EL devices, a glass substrate 6 is furnished outside the transparent anode 2. The recombination of electrons infused from the metal cathode 1 and the holes infused from the transparent anode 2 to the emitting layer 3 generates excitons. The excitons emit light when they are deactivated through radiation. This light radiates toward outside through the transparent anode 2 and the glass substrate 6.

Such aforementioned organic EL device can emit light even by application of a lower voltage. It is however expected to develop an EL device capable of emission at a further high luminance efficiency.


An object of the present invention is to provide an organic EL device capable of stably emitting light at a high luminance and a high efficiency to satisfy the above mentioned expectation.

An organic EL device according to a first aspect of the present invention comprises an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a 1,10-phenanthroline derivative represented by the following chemical formula (1a)

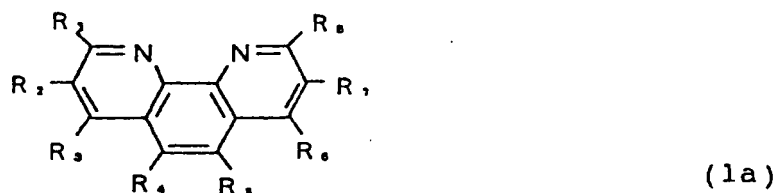


where $R_1 - R_8$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

An organic EL device according to a second aspect of the present invention comprises an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a 1,7-phenanthroline derivative represented by the following chemical formula (1b)

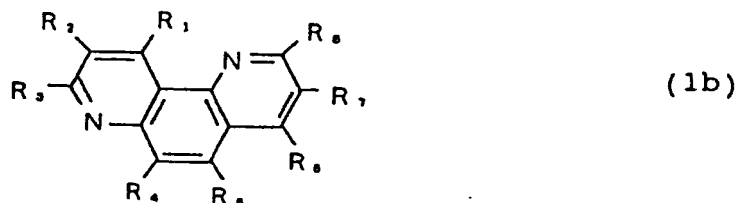


where $R_1 - R_8$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

An organic EL device according to a third aspect of the present invention comprises an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a 4,7-phenanthroline derivative represented by the following chemical formula (1c)

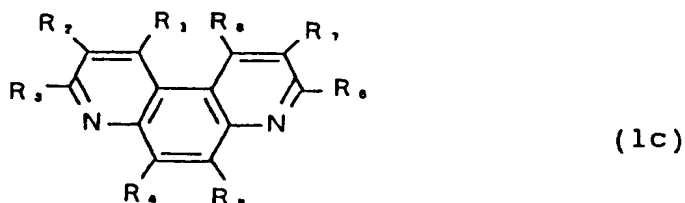

where $R_1 - R_8$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

An organic EL device according to a fourth aspect of the present invention comprises an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a phenanthroline derivative framed by 5,6-dihydro-dibenzo[bj]phenanthroline represented by the following chemical formula (1d)

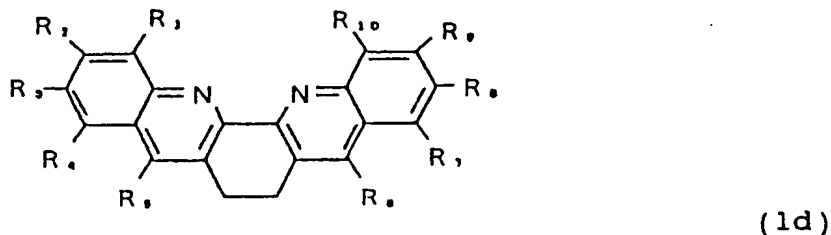

where $R_1 - R_{10}$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

According to the present invention, there is obtained an organic EL device capable of stably emitting light at a high luminance and a high efficiency with the durability.

Fig. 1 is a schematic diagram showing an organic EL device with two-layer structure;

Fig. 2 is a schematic diagram showing an organic EL device with three-layer structure; and





Fig. 3 is a graph showing luminance changes in the lapse of time with respect to organic EL devices of both Example 6 and Comparative 2.





The embodiments according to the present invention will be described in more detail with reference to the accompanying drawings.





The EL device in accordance with the present invention is similar to the organic EL device of the structure shown in Fig. 2. Such an EL device has the three-layer structure formed by layering an organic electron transport layer 5, the organic fluorescent film 3 and the organic positive-hole transport layer 4 in sequence between a pair of the metal cathode 1 and the transparent anode 2. In this structure of the EL device, at least one of the electrodes 1 and 2 may be transparent. The cathode 1 is formed of a metal with a lower work function such as aluminum, magnesium, indium, silver or alloys of the individual metals thereof in the thickness range of from about 100 to 5000 angstroms. The transparent anode 2 is formed of an

electric conductive material with a higher work function such as indium-tin oxide (ITO) in the thickness range of from about 1000 to 3000 angstroms. Alternatively, the transparent anode 2 may be formed of gold with the thickness of from about 800 to 1500 angstroms. The electrode of gold thin film is semitransparent.

The hole transport layer 4 of Fig. 2 is made of a triphenylamine derivative represented by the following formula (2). The organic hole transport layer 4 may also be made of a carrier transmitting material (CTM) represented by the following formulas (3) to (13).

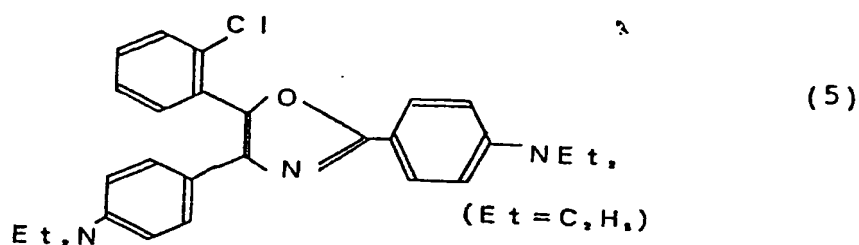

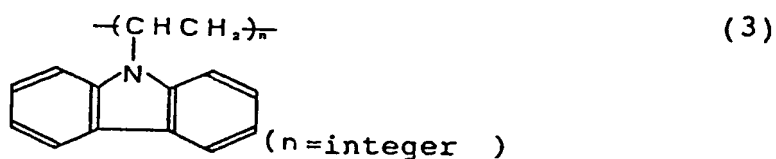
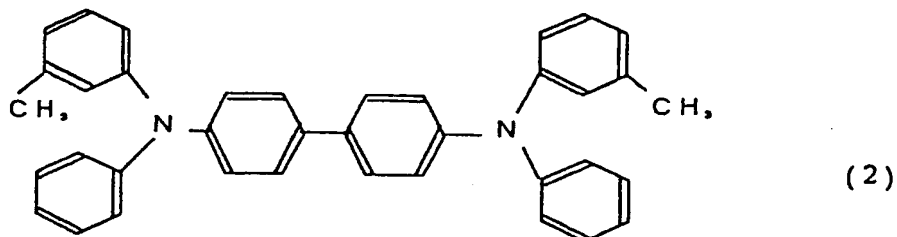


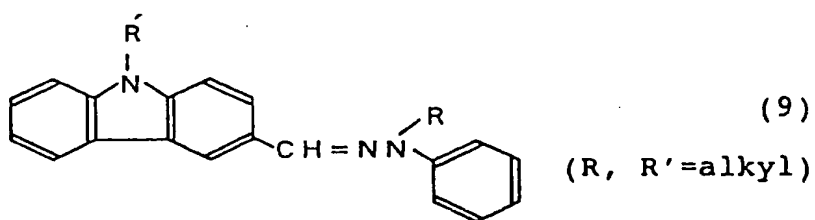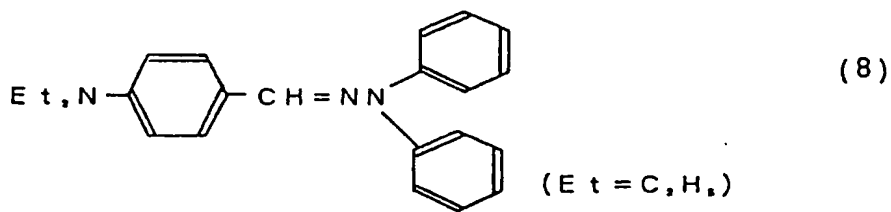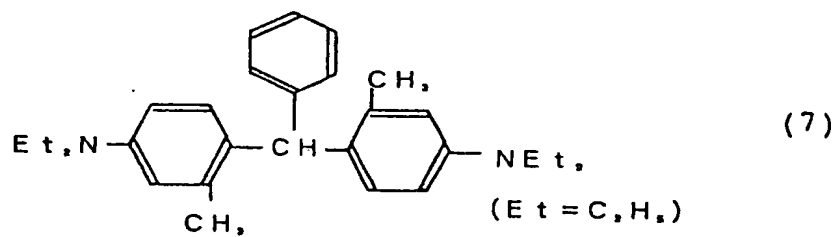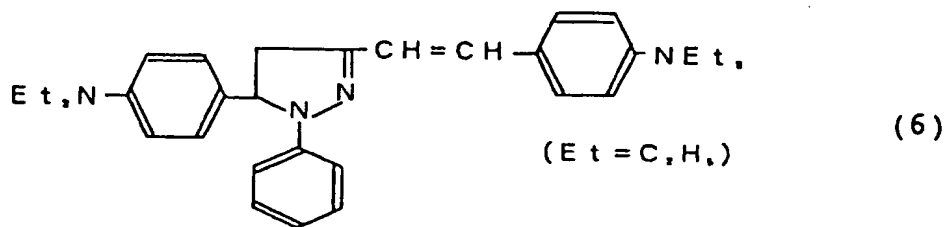

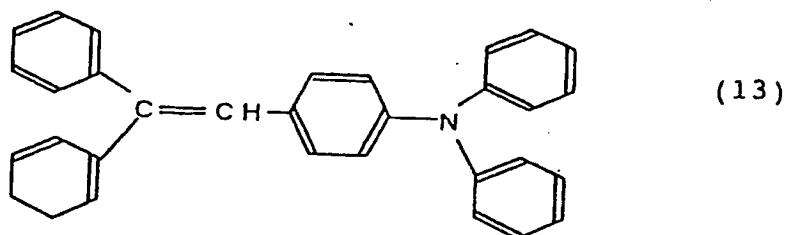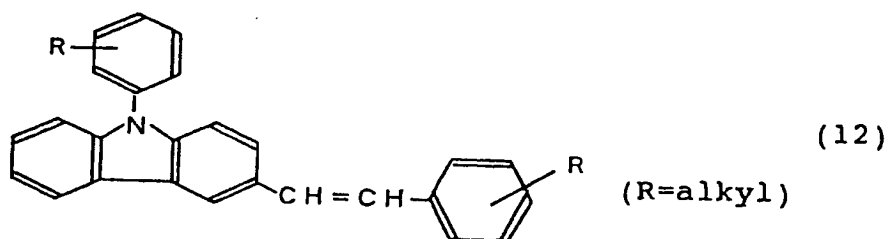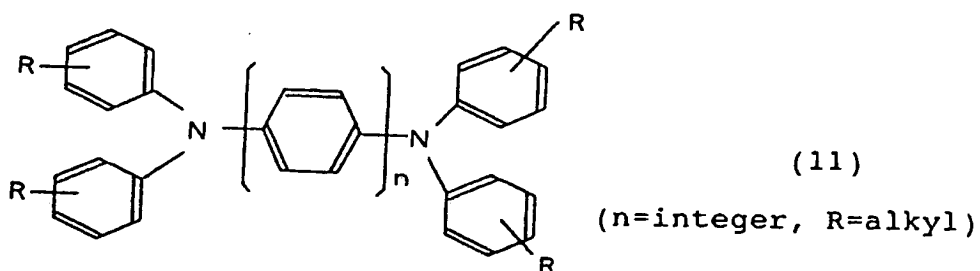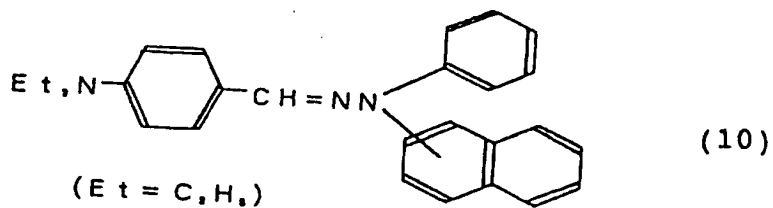


The emitting layer 3 of the organic EL device comprises the organic fluorescent compound. Preferred examples of the compound are tetraphenylbutadiene (TPB) derivatives respectively represented by the following chemical formulas 14 to 16 and 16a.


50

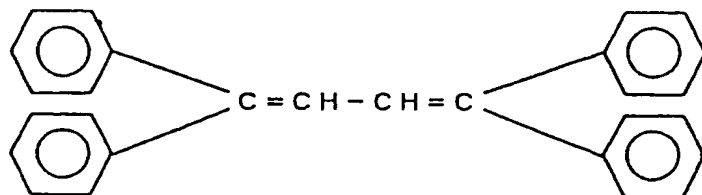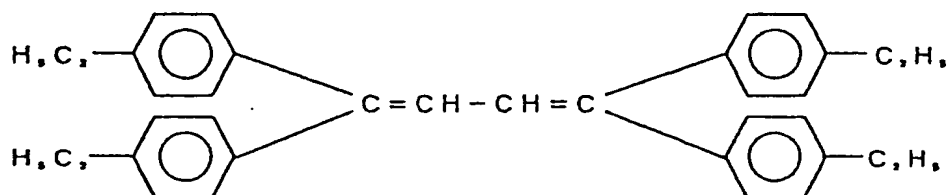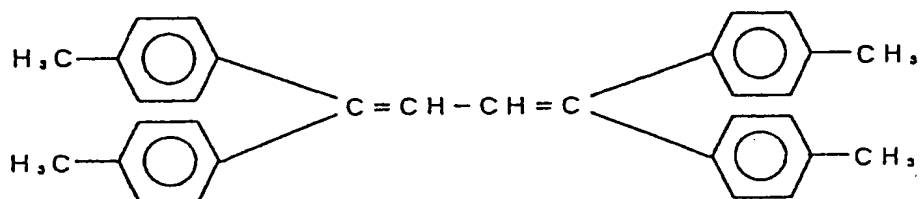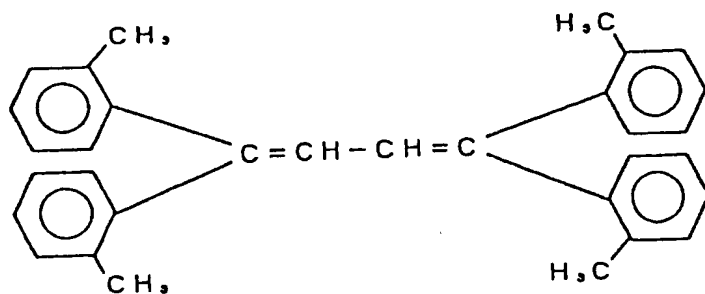


In addition, other preferred examples used for the emitting layer 3 are represented by the following formulas 17 to 25. The emitting layer 3 may include another fluorescent compound as a guest material. The thickness of the emitting layer 3 is within 1 micron meter or less.




(17)




(18)

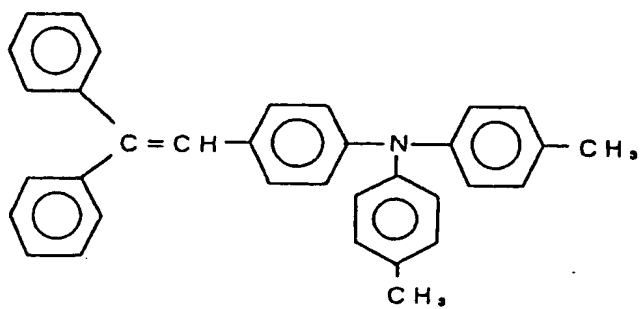


(19)

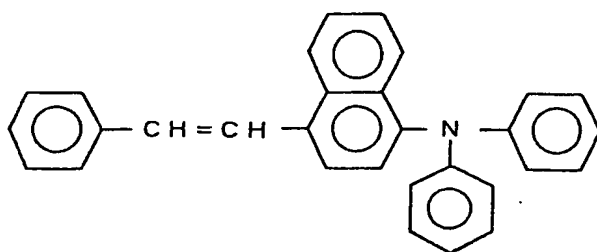


(20)

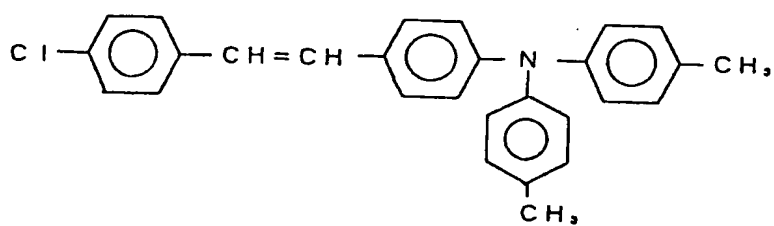


(21)

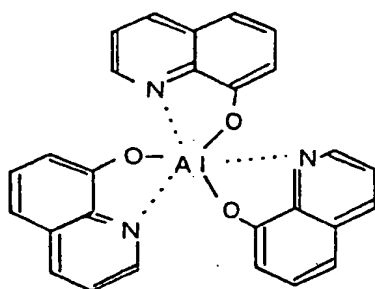


(22)

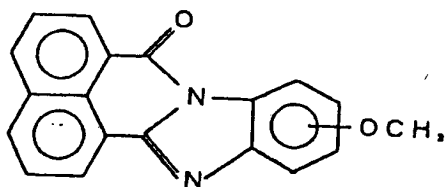

(23)

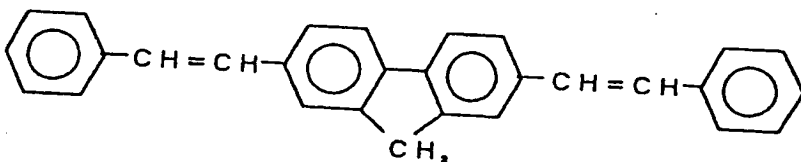


(24)



(25)


The electron transport layer 5 is preferably made of a phenanthroline derivative generally represented by the following chemical formula (1a) which is framed by 1,10-phenanthroline hereinafter denoted by formula (26).

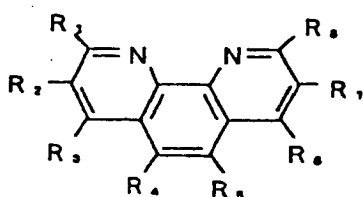


(1a)

where $R_1 - R_8$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.


Preferred examples of 1,10-phenanthroline derivatives which may be employed as the electron transport layer 5 are represented by the following chemical formulas 26 to 82.




(26)




(27)




(28)




(29)




(30)




(31)




(32)




(33)




(34)

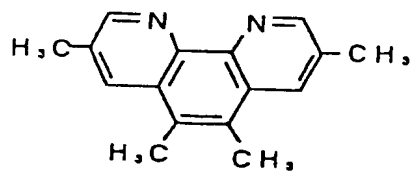


(35)




(36)




(37)

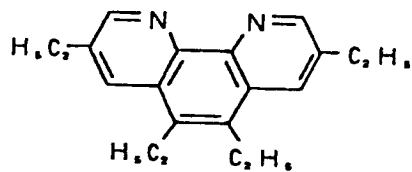

(38)

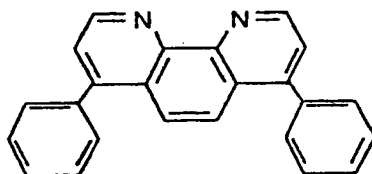


(39)

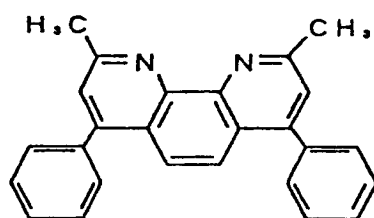

(40)


5

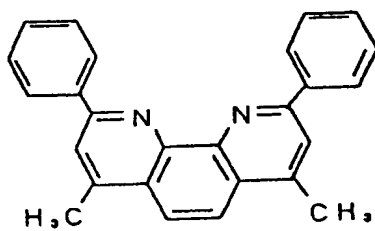

(41)

10


15

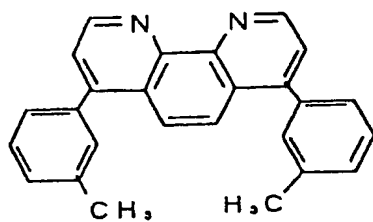

(42)

20

25

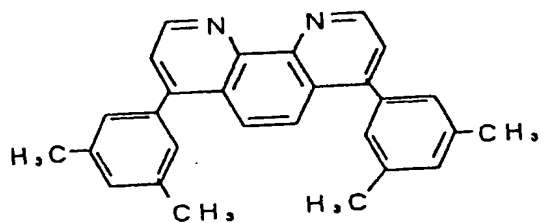


(43)

30

35

40




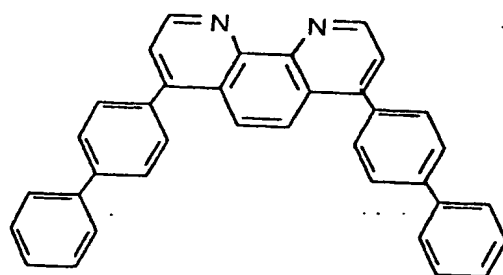



(44)

45


50

55

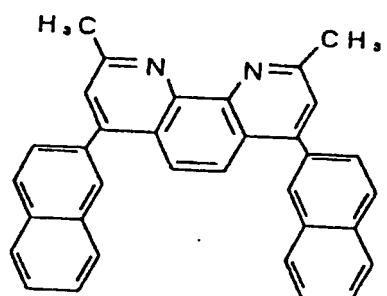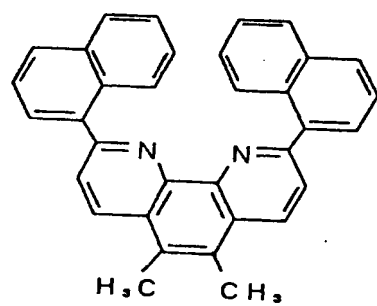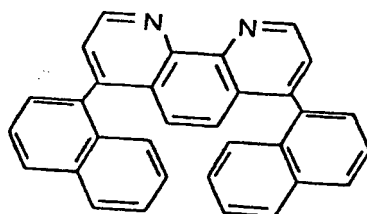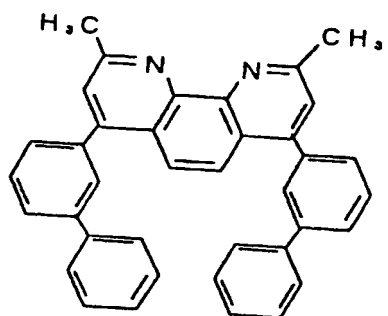


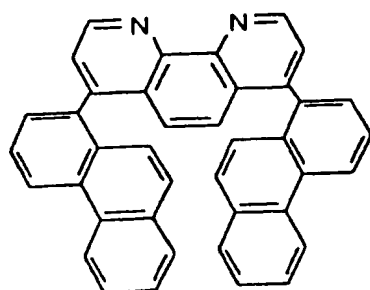


(49)

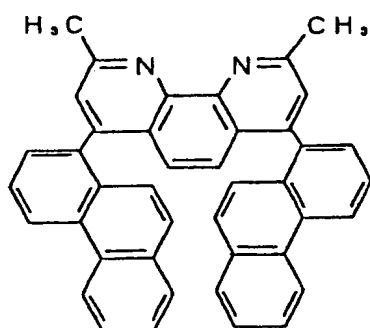


(50)

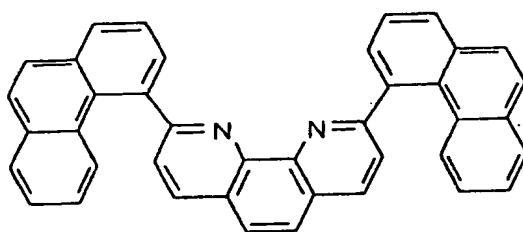


(51)

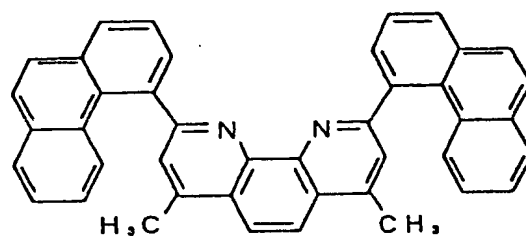


(52)

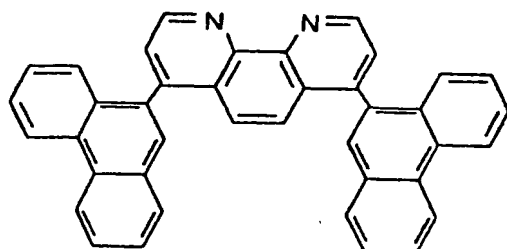


(53)

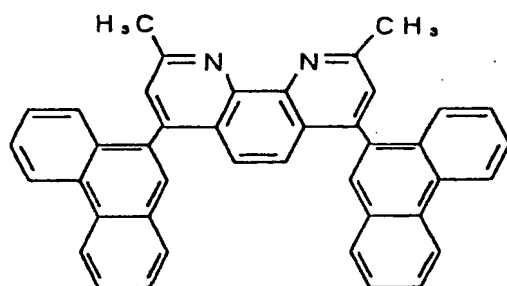




(54)




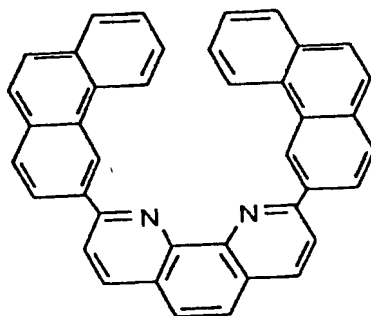



(55)

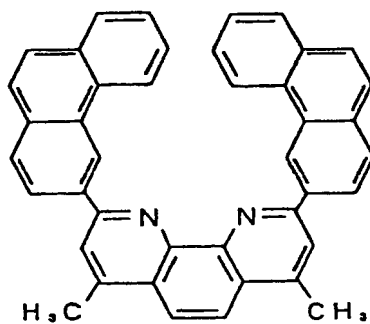


(56)

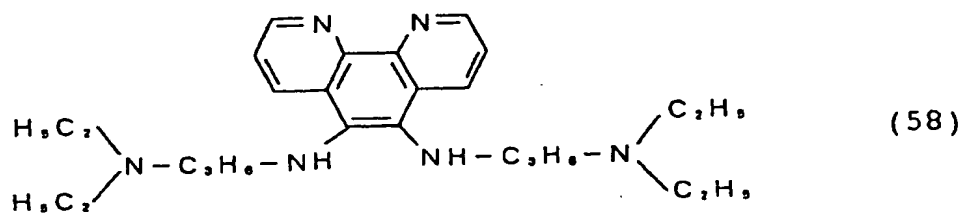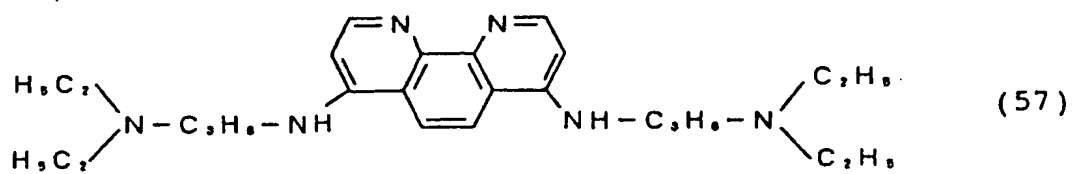

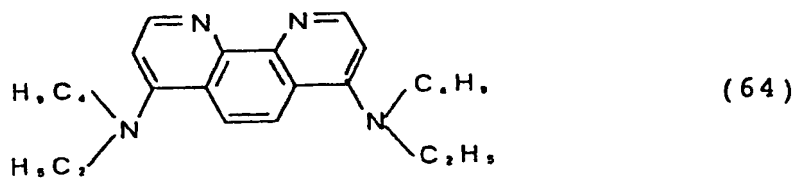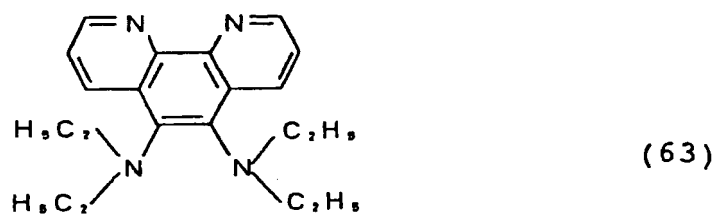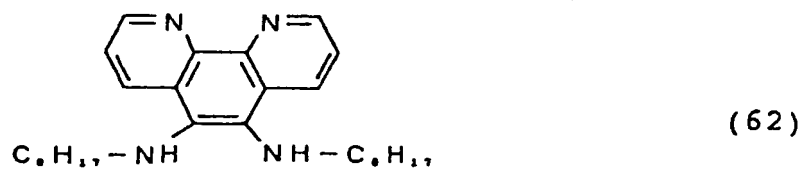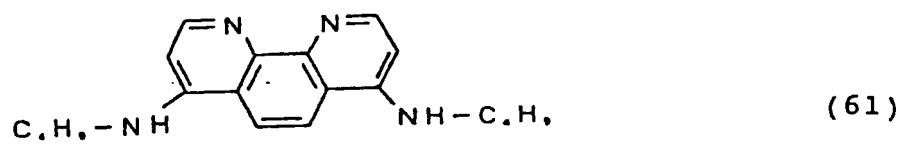





(65)




(66)




(67)




(68)




(69)




(70)




(71)




(72)




(73)




(74)




(75)




(76)




(77)




(78)




(79)



(80)




(81)




(82)

In addition, other preferred examples used for the electron transport layer 5 are 1,7-phenanthroline derivative represented by the following formula (1b) and 4,7-phenanthroline derivative represented by the following formula (1c).

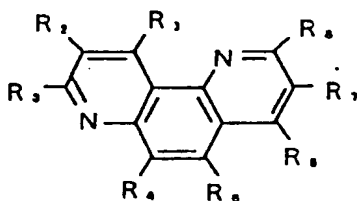


(1b)

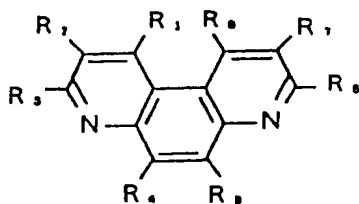

(1c)


where R₁ - R₈ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

Furthermore, another preferred examples used for the electron transport layer 5 is is made of a phenanthroline derivative framed by 5,6-dihydro-dibenzo[bj]phenanthroline represented by the following chemical formula (1d):

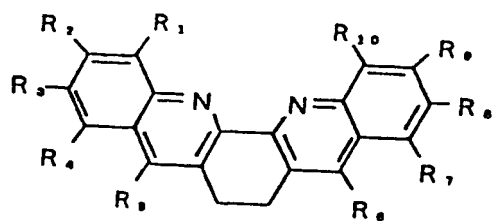


(1d)


where R₁ - R₁₀ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group. Preferred examples of dihydro-dibenzo-phenanthroline derivatives represented by the following chemical formulas (88) - (91). The present invention is not restricted with these examples mentioned above.

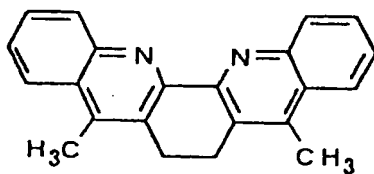


(88)

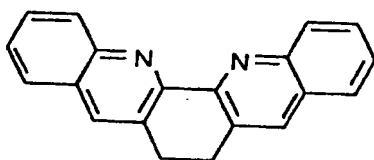

(89)

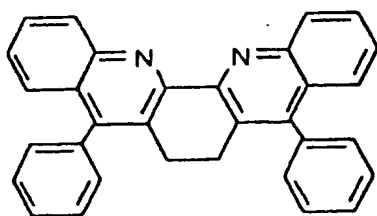

(90)

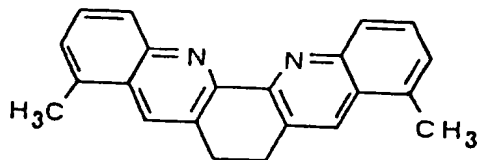

(91)

(Example 1)

A glass substrate on which an anode of ITO had been formed at 1500Å thick, was prepared. The substrate was washed by ultrasonic wave for 5 minutes in ethanol. After the substrate were dried, the triphenylamine derivative denoted by formula (2) was deposited on the ITO anode at the vacuum deposition rate of 3 Å /sec by using a tantalum boat carrying the derivative to be a hole transport layer with the thickness of 500Å . Each of this film and the followings were formed by a vacuum deposition method at a vacuum conditions equal to or less than 1.0×10^{-6} Torr.

Next, the tetraphenylbutadiene derivative of emitting substance denoted by formula (15) was deposited on the hole transport layer at the vacuum deposition rate of 4 Å /sec to be an emitting layer with the thickness of 200Å .

Next, the 1,10-phenanthroline derivative denoted by formula (39) was deposited on the emitting layer at the vacuum deposition rate of 3 Å /sec to be an electron transport layer with the thickness of 500Å .

Then, the magnesium and silver alloy was vacuum co-deposited on the electron transport layer in such a manner that magnesium was deposited at the deposition rate of 10Å /sec simultaneously silver deposited at the deposition rate of 1Å /sec to be a cathode with the thickness of 1500 Å .

When the resultant EL device was operated with the application of the DC voltage 5V between the ITO anode and the Mg-Ag cathode, the emission of this EL device was luminance of 25 cd/m² of blue light. The luminance efficiency was 0.7 lm/W.

(Example 2)

An EL device was assembled by the same procedure as in Example 1, except that the electron transport layer was made of another 1,10-phenanthroline derivative represented by formula (40) instead of the derivative used in Example 1.

When the resultant EL device was operated with the application of the DC voltage 12V between the ITO anode and the Mg-Ag cathode, the emission of this EL device was luminance of 47 cd/m² of blue light. The luminance efficiency was 0.3 lm/W.

(Example 3)

An EL device was assembled by the same procedure as in Example 1, except that the emitting layer was made of another tetraphenylbutadiene derivative represented by formula (14) instead of the emitting substance used in Example 1.

When the resultant EL device was operated with the application of the DC voltage 7V between the ITO anode and the Mg-Ag cathode, the emission of this EL device was luminance of 72 cd/m² of blue light. The luminance efficiency was 0.4 lm/W.

(Example 4)

An EL device was assembled by the same procedure as in Example 1, except that the emitting layer was made of 1,1,4,4-tetraphenyl-1,3-butadiene represented by formula (16a) instead of the emitting substance used in Example 1.

When the resultant EL device was operated with the application of the DC voltage 6V between the ITO anode and the Mg-Ag cathode, the emission of this EL device was luminance of 63 cd/m² of blue light. The luminance efficiency was 1.5 lm/W. When the resultant EL device was further operated with the application of the DC voltage 13V, the emission of this EL device was luminance of 5800 cd/m² of blue light.

(Example 5)

An EL device was assembled by the same procedure as in Examples 1 and 4, except that the cathode with the thickness of 800Å was made of aluminum and lithium alloy at the Li concentration 0.2 wt.% in such a manner that the alloy was vacuum co-deposited on the electron transport layer at the deposition rate of 10Å/sec. instead of the cathode substance used in Example 4.

When the resultant EL device was operated with the application of the DC voltage 5V between the ITO anode and the Al-Li cathode, the emission of this EL device was luminance of 82 cd/m² of blue light. The luminance efficiency was 2.4 lm/W. When the resultant EL device was further operated with the application of the DC voltage 12V, the emission of this EL device was luminance of 9700 cd/m² of blue light.

(Comparative example 1)

An EL device was assembled by the same procedure as in Example 1, except that the electron transport layer was not formed between the emitting layer and the cathode.


When the resultant EL device was operated with the application of the DC voltage 12V between the ITO anode and the Mg-Ag cathode, the emission of this EL device was luminance of 24 cd/m² of blue light. The luminance efficiency was 0.02 lm/W which was one figure less than that of Example 1.

(Example 6)

An EL device was assembled by the same procedure as in Example 4. When the resultant EL device was kept by the constant-current application to emit light with luminance of 82 cd/m² at the same conditions of Example 1, the half-life of the initial luminance of this EL device was 4 hours and 45 minutes under a vacuum state.

(Comparative example 2)

An EL device was assembled by the same procedure as in Examples 1 and 4, except that the electron transport layer 5 was made of 2-(4'-tert-butylphenyl)-5-(4''-biphenyl)-1,3,4-oxadiazole (so called t-Bu-PBD which is well known as one of superior electron transport materials) denoted by the following chemical formula (86) instead of the electron transport material used in the Example 4.

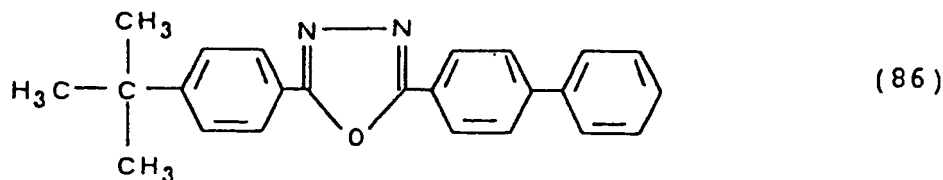

When the resultant EL device was operated with the application of the DC voltage 7V between the ITO anode and the Mg-Ag cathode, the emission of this EL device was luminance of 29 cd/m² of blue light. The luminance efficiency was 1.4 lm/W. When the resultant EL device was further operated with the application of the DC voltage 13V, the emission of this EL device was luminance of 1300 cd/m². The maximum luminance of Comparative 2 was about 1/4 lower than that of Example 4.

When the resultant EL device was kept by the constant-current application to emit light with luminance of 40 cd/m², the half-life of the initial luminance of this EL device was 4 minutes under a vacuum state, which was far less than that of Example 6 as shown in Fig. 3.

5 (Example 7)

An EL device was assembled by the same procedure as in Examples 1 and 4, except that the electron transport layer was made of another 1,10-phenanthroline derivative represented by formula (40) instead of the derivative used in Example 1.

10 When the resultant EL device was kept by the constant-current application to emit light with luminance of 200 cd/m², the half-life of the initial luminance of this EL device was 4 hours and 45 minutes under a vacuum state. When the initial luminance of 40 cd/m² was kept, the half-life of the initial luminance of this EL device was 35 hours. When the initial luminance of 10 cd/m² was kept, the half-life of the initial luminance of this EL device was 100 hours. The half-life of the initial luminance of this EL device was
15 greatly expanded in comparison with that of Example 2.

(Example 8)


20 An EL device was assembled by the same procedure as in Examples 1 and 4, except that the electron transport layer was made of 5,6-dihydro-dibenzo[bj]phenanthroline derivative represented by formula (88) instead of the hole transport material used in Example 1.

When the resultant EL device was kept by the constant-current application to emit light with luminance of 40 cd/m², the half-life of the initial luminance of this EL device was 33 hour, which was greatly expanded in comparison with that of Example 2.

25 As described above, the organic EL device according to the present invention comprises the electron hole transport layer, the organic emitting layer and the organic hole transport layer laminated in sequence and arranged between the cathode and the anode, in characterized in that the electron transport layer made of 1,10- or 1,7- or 4,7-phenanthroline derivative or 5,6-dihydro-dibenzo[bj]phenanthroline derivative. The organic EL device according to the present invention is capable of improving the durability and to emit blue
30 light at a high luminance and a high efficiency upon application of a low voltage.


Claims

35 1. An organic Electroluminescence device comprising an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a 1,10-phenanthroline derivative represented by the following chemical formula

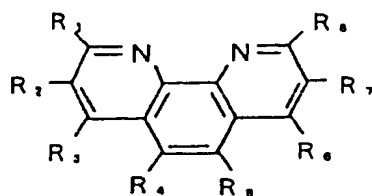


50 where R₁ - R₈ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

55 2. An organic Electroluminescence device comprising an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a 1,7-phenanthroline derivative represented by the following chemical formula

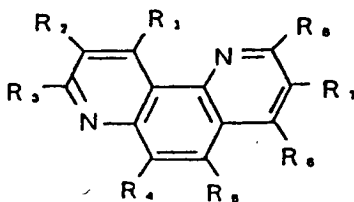


where $R_1 - R_8$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

3. An organic Electroluminescence device comprising an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a 4,7-phenanthroline derivative represented by the following chemical formula

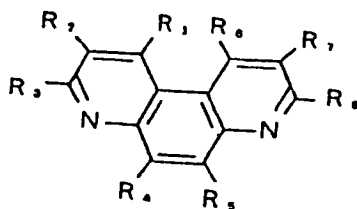

where $R_1 - R_8$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

4. An organic Electroluminescence device comprising an anode, a hole transport layer of organic compound, an emitting layer of organic compound, an electron transport layer of organic compound and a cathode, which are laminated in sequence, wherein said electron transport layer is made of a phenanthroline derivative framed by 5,6-dihydro-dibenzo[bj]phenanthroline represented by the following chemical formula

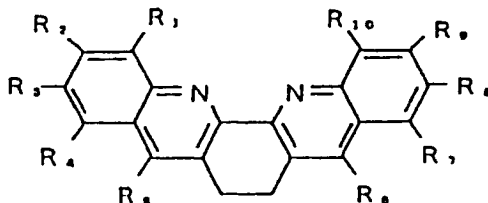

where $R_1 - R_{10}$ independently represent a hydrogen atom, a substituted or unsubstituted alkyl group, a substituted or unsubstituted aryl group, a substituted or unsubstituted amino group, a halogen atom, a nitro group, a cyano group or a hydroxyl group.

FIG. 1

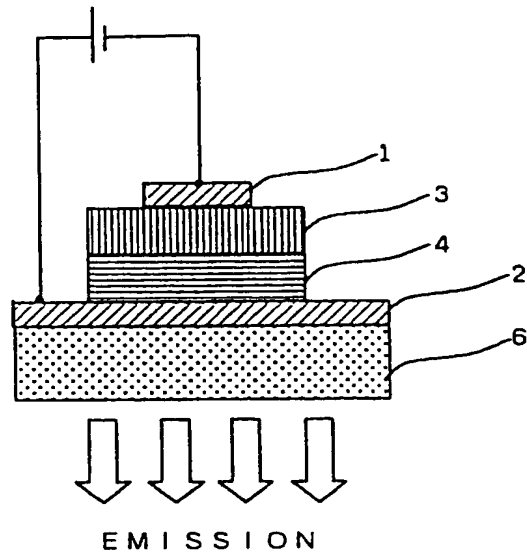


FIG. 2


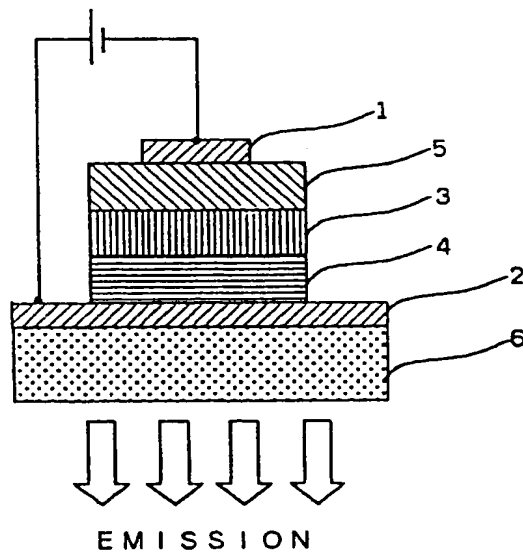


FIG. 3



19

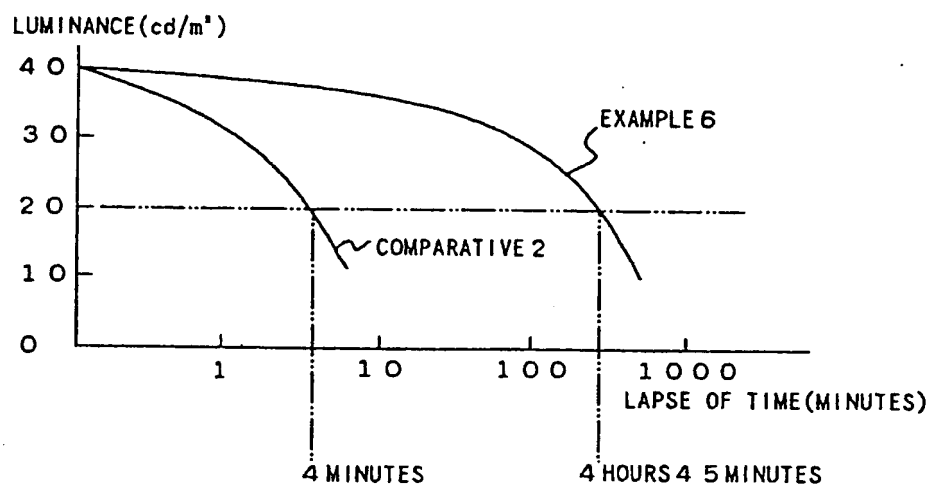

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 564 224 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 93302459.8

(51) Int. Cl.⁵: **H05B 33/14**, **H05B 33/12**

(22) Date of filing: 30.03.93

(30) Priority: 03.04.92 JP 82197/92
24.11.92 JP 313618/92

(43) Date of publication of application:
06.10.93 Bulletin 93/40

(84) Designated Contracting States:
DE FR GB NL

(88) Date of deferred publication of the search report:
19.01.94 Bulletin 94/03

(71) Applicant: **PIONEER ELECTRONIC CORPORATION**
4-1, Meguro 1-chome
Meguro-ku Tokyo(JP)


(72) Inventor: **Nakada, Hitoshi**, c/o Corporate R&D Lab.
Pioneer Electronic Corp.,
6-1-1, Fujimi
Tsurugashima-shi, Saitama 350-02(JP)

(74) Representative: **Luckhurst, Anthony Henry William**
MARKS & CLERK
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(54) **Organic electroluminescence device.**

(57) An organic electroluminescence device comprises an electron transport layer (5), an organic emitting layer (3) and an organic hole transport layer (4) laminated in sequence and arranged between a cathode (1) and an anode (2), is characterised in that the electron transport layer is made of a 1,10- or 1,7- or 4,7-phenanthroline derivative or a 5,6-dihydro-dibenzo(bj)phenanthroline derivative. The electroluminescence device is capable of improved durability and emission of blue light at high luminance and high efficiency on application of a low voltage.

FIG. 2

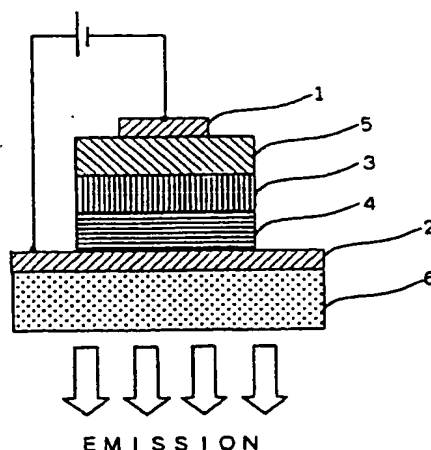

EP 0 564 224 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 30 2459

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
X	US-A-5 077 142 (Y.SAKON & AL) * column 5, line 15 * * column 8, line 60 * * column 73, line 162; claims 1-5 * -----	1	H05B33/14 H05B33/12
			TECHNICAL FIELDS SEARCHED (Int.Cl.5)
			H05B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 November 1993	Examiner DROUOT, M
CATEGORY OF CITED DOCUMENTS			
<div><div>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</div><div>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document</div></div>			

1
EPO FORM 1503 (01.92) (P04.001)